

Passive module - FLKM 50-W80/ 80/PLC - 2288477

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Marshalling connector, 2 x 32 channels can be connected, with 6.3/2.8 mm slip-on connections on the jumpering level



Key commercial data

Packing unit	1 pc
GTIN	 4 017918 057022
Weight per Piece (excluding packing)	841.9 GRM
Custom tariff number	85369010
Country of origin	Germany

Technical data

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Nominal voltage U_N	24 V AC/DC
Max. current carrying capacity per branch	1 A
Number of positions	50
Status display	No
Test voltage	800 V AC (50 Hz, 1 min.)
Mounting position	any
Standards/regulations	IEC 60664
	IEC 60664 A
	DIN VDE 0110
	DIN VDE 0160 (in parts)

Passive module - FLKM 50-W80/ 80/PLC - 2288477

Technical data

General

Pollution degree	2
Surge voltage category	II

Connection data for connection 1

Connection name	Flat-ribbon cable connection
Connection method	Flat-ribbon cable connection
Number of positions	50

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27371601
eCl@ss 7.0	27371601
eCl@ss 8.0	27371601

ETIM

ETIM 2.0	EC001437
ETIM 3.0	EC001437
ETIM 4.0	EC001437
ETIM 5.0	EC001437

UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

Approvals

Approvals

Approvals

GOST

Passive module - FLKM 50-W80/ 80/PLC - 2288477

Approvals

Ex Approvals

Approvals submitted


Approval details



Drawings


Passive module - FLKM 50-W80/ 80/PLC - 2288477

Dimensioned drawing

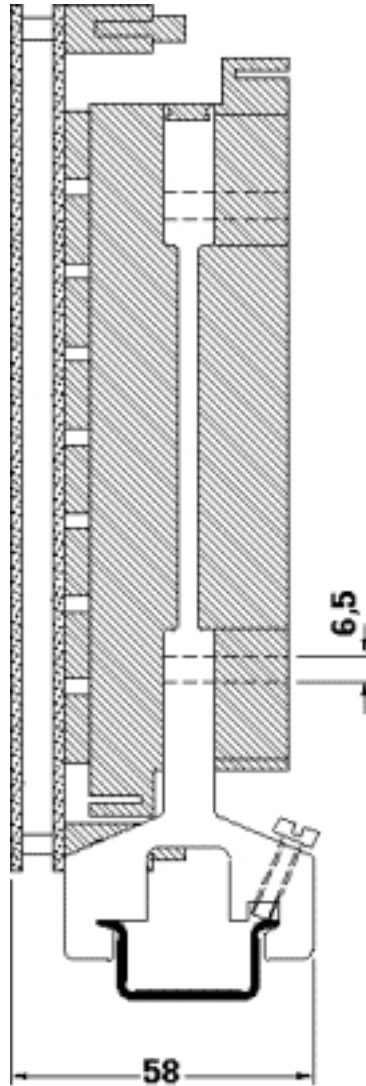


Passive module - FLKM 50-W80/ 80/PLC - 2288477

Dimensioned drawing

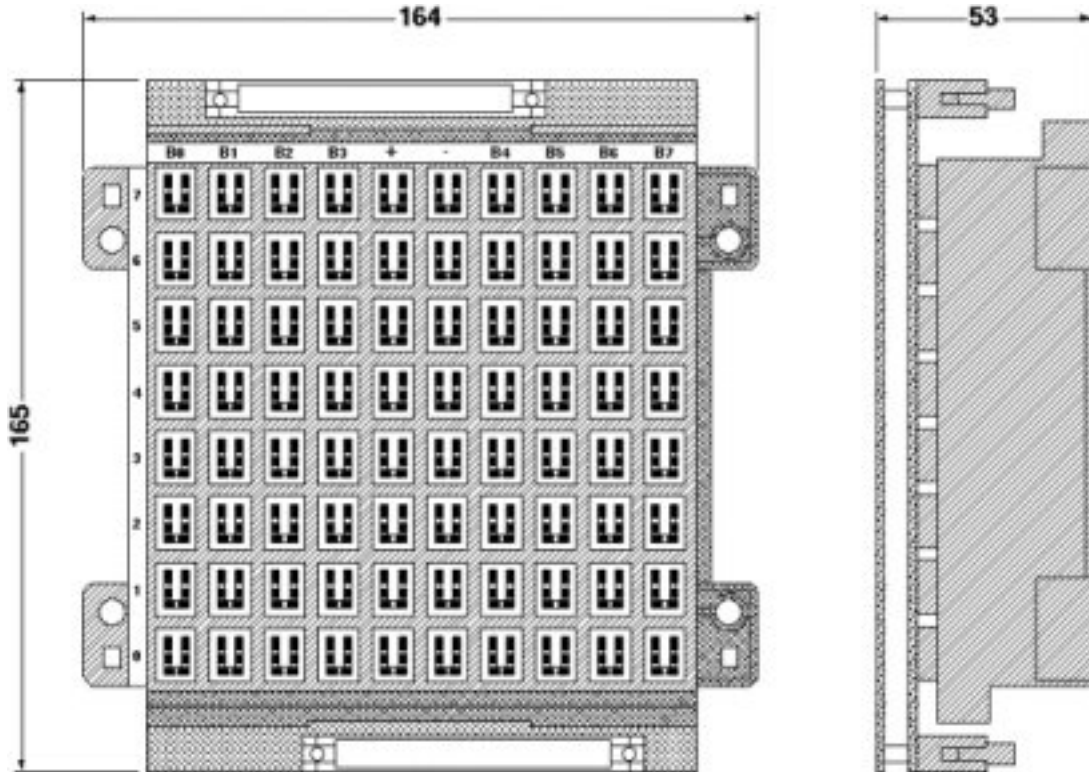

Passive module - FLKM 50-W80/ 80/PLC - 2288477

Dimensioned drawing

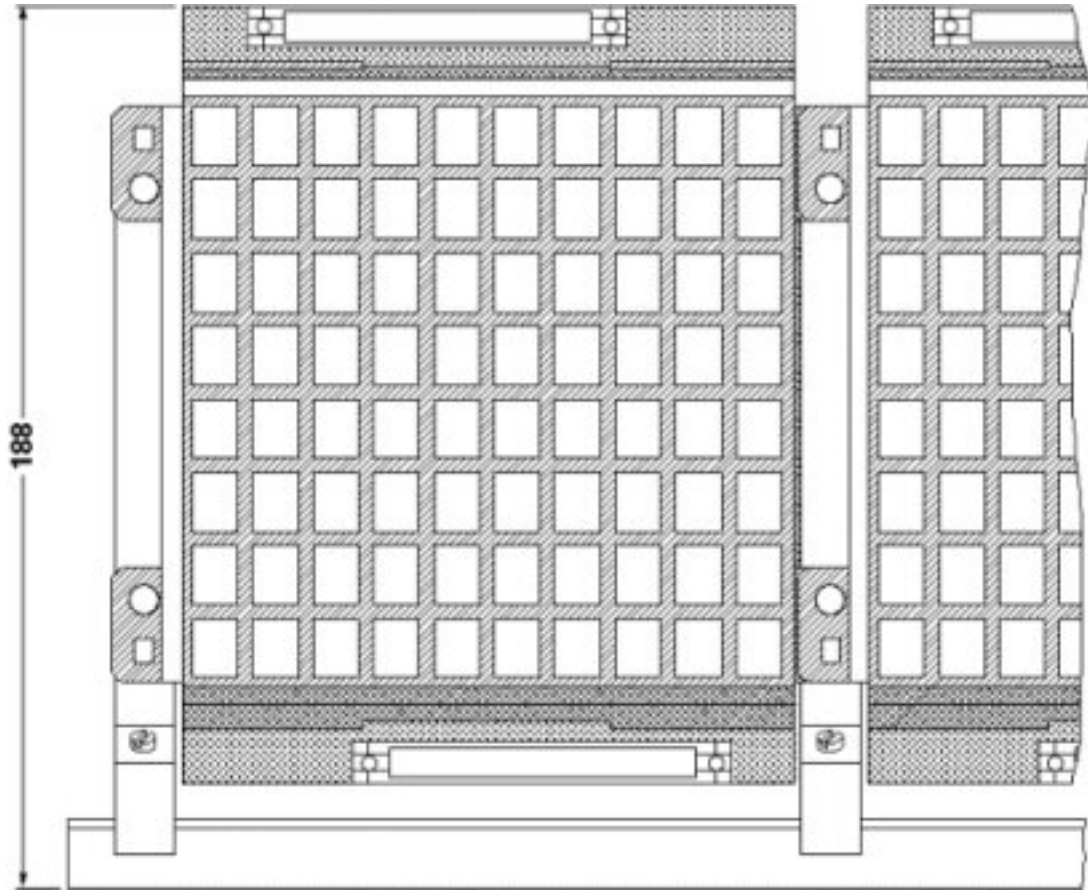

Circuit diagram

