

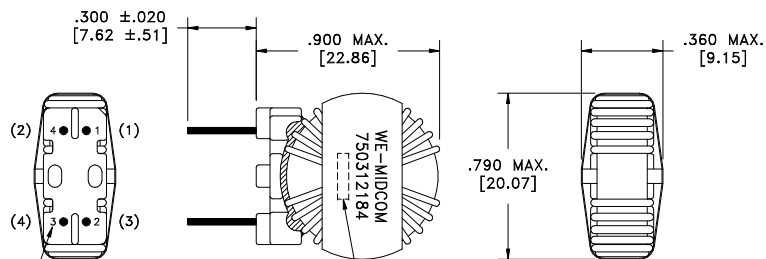


| | | |
|-------------------|------|---------------|
| CUSTOMER TERMINAL | RoHS | LEAD(Pb)-FREE |
| Sn96%, Ag4% | Yes | Yes |

more than you expect

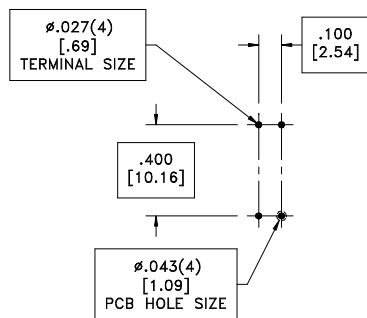

LOT CODE & DATE CODE
 TERM. NO.'s FOR REF. ONLY
 CUSTOMER TERM. NO.'S IN ()



RECOMMENDED
 P.C. PATTERN, COMPONENT SIDE

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

| PARAMETER | TEST CONDITIONS | VALUE |
|--------------------|----------------------------------|---------------|
| D.C. RESISTANCE | 1-4 @20°C | 34 mOhms max. |
| D.C. RESISTANCE | 2-3 @20°C | 34 mOhms max. |
| INDUCTANCE | 1-4 1kHz, 100mVAC, Ls | 4.00mH ±32% |
| INDUCTANCE | 2-3 1kHz, 100mVAC, Ls | 4.00mH ±32% |
| LEAKAGE INDUCTANCE | 1-4 tie(2+3), 10kHz, 100mVAC, Ls | 21.85uH max. |
| DIELECTRIC | 1-2 1600VAC, 1 second | - |
| URNS RATIO | (1-4):(2-3) | 1:1, ±1% |

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

CURRENT RATING: 2A

Wire insulation & RoHS status not affected by wire color.
 Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

| | | | | | | |
|------|------|--|----------------------|--|---|------------------------------|
| REV. | DATE | Packaging Specifications Method: Tray PKG-0058 www.we-online.com/midcom | | Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.001 [.03] | DRAWING TITLE INDUCTOR COMMON MODE CHOKE | PART NO. 750312184 |
| 6A | 5/11 | SEE REVISION SHEET FOR REVISION LEVEL | CONVENTION PLACEMENT | This drawing is dual dimensioned. Dimensions in brackets are in millimeters. | eiSos p/n: 750312184 | SPECIFICATION SHEET 1 OF 1 |