

## SUMMARY

### # Wires

|         |   |
|---------|---|
| Low     | 0 |
| High    | 0 |
| Coax    | 0 |
| Triax   | 0 |
| Quad    | 0 |
| Fiber   | 0 |
| Fluidic | 0 |



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

|                  |                         |
|------------------|-------------------------|
| Series           | 0M                      |
| Termination type | No contacts / Accessory |
| IP rating        | 50                      |
| Cable Ø          | 0.00 - 0.00 mm          |
| Matching parts   |                         |
| Status           |                         |
| Alternative part |                         |

## TECHNICAL DETAILS

### Mechanics

|                   |   |
|-------------------|---|
| Shell Style/Model | BGF*: Blanking cap for free receptacle (arctic grip)  |
| Keying            |   |
| Housing Material  | Environment friendly aluminium (nickel plated, anthracite color) shell and nut, other pieces bronze/brass |
| Cable Fixing      | ∅ 0 - 0 mm  |
| Variant           |   |

### Performance

|               |
|---------------|
| Configuration |
| Insulator     |
| Rated Current |

### Specifications

Contact LEMO for performance details.


### Others

Humidity (max): <=95% [at 60 deg C / 140 F]

Vibration: 15 g [10 Hz - 2000 Hz]  
 Shock Resistance: 100 g [ 6 ms]  
 Operating temperature: -55 °C/ +200 °C  
 Climatical Category: 15/200/21 (Al. shell)  
 Lighting strike EIA 364-75 10K amps - 6 times  
 EMI Shielding EIA 364-66A - 1Ghz-80 dB,3GHz-70 dB,6GHz- 58dB  
 IP Rating: 50

## DRAWINGS

### Draws

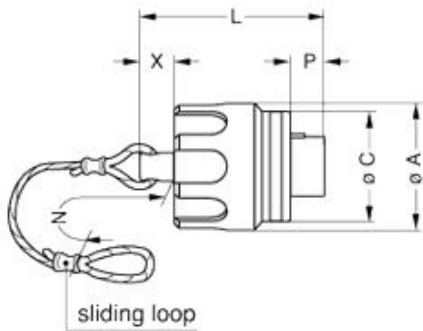

### Dimensions

|     | A    | C    | L    | N    | P    | X    |
|-----|------|------|------|------|------|------|
| mm. | 14.4 | 12.7 | 23.4 | 85   | 3.9  | 6    |
| in. | 0,57 | 0,50 | 0,92 | 3,35 | 0,15 | 0,24 |

## RECOMMENDED BY LEMO

### Tools

None

### Cables