
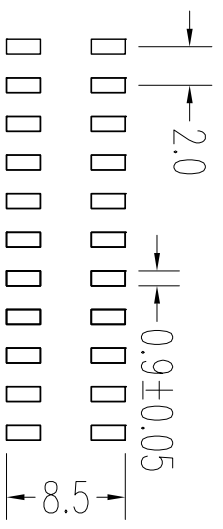

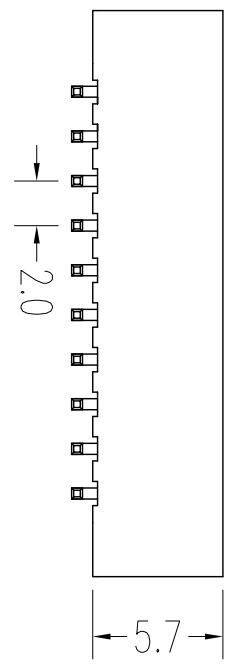


REV.	DESCRIPTION	DATE
A	RELEASE	2012.11.12

NOTES:  
 Insulator Material: Nylon-6T, UL 94V-0  
 Contact Plating: Flash Gold  
 Contact Material: Brass  
 Current Rating : 1A AC,DC  
 Contact Resistance: 20MΩ Max.  
 Dielectric Withstanding: AC 500V  
 Insulator Resistance: 1000MΩ Min.  
 Operating Temp.: -40°C~+105°C

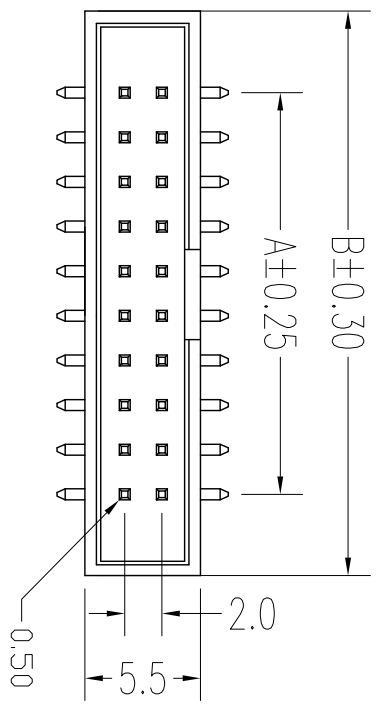

PCB LAYOUT

NUMBER OF POSITIONS	DIMENSION	
	A	B
06	4.00	11.20
08	6.00	13.20
10	8.00	15.20
12	10.00	17.20
14	12.00	19.20
16	14.00	21.20
18	16.00	23.30
20	18.00	25.20
24	22.00	29.20
26	24.00	31.20
30	28.00	35.20
34	32.00	39.20
40	38.00	45.20
44	42.00	49.20
50	48.00	55.20
60	58.00	65.20
64	62.00	69.20

RoHS

UNLESS TOLERANCE	
GENERAL	ANGLE
X. ± 0.30	X°. ± 3.0°
.X ± 0.20	.X° ± 2.0°
.XX ± 0.15	.XX° ± 1.0°
.XXX ± 0.08	.XXX ± 0.5°

DRAW	BY	DESIGN	BY	CHECK	BY	APPROVE	BY
SCALE	1:1	SHEET	1/1	UNIT	MM	DRAW NO.:	3120-XX-0300-00

Cnc Tech, LLC

Port NO.  
3120-XX-0300-00

REV: A