

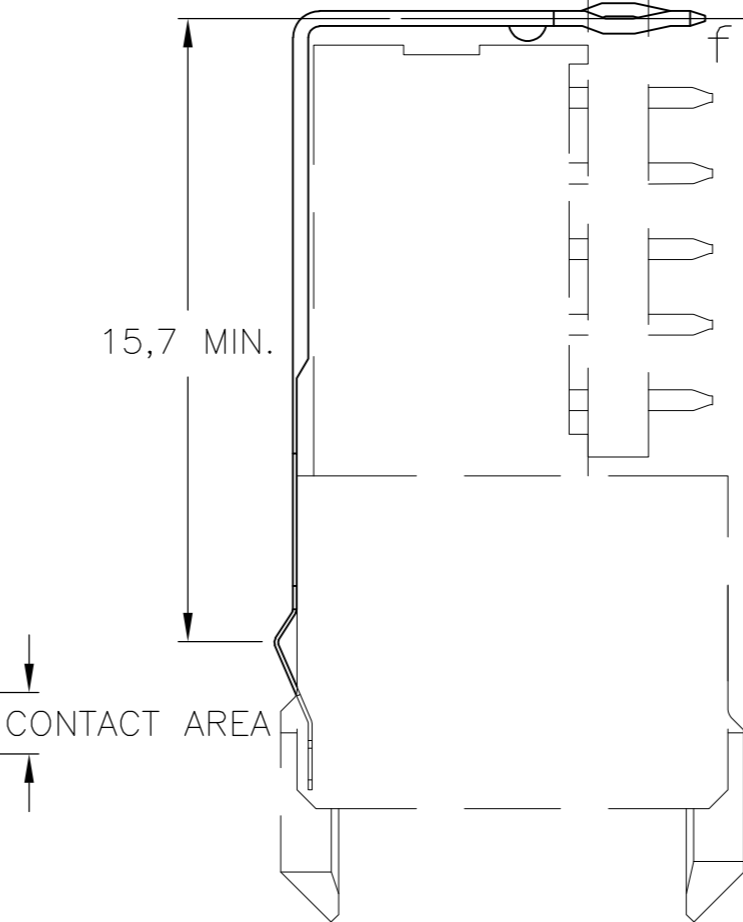
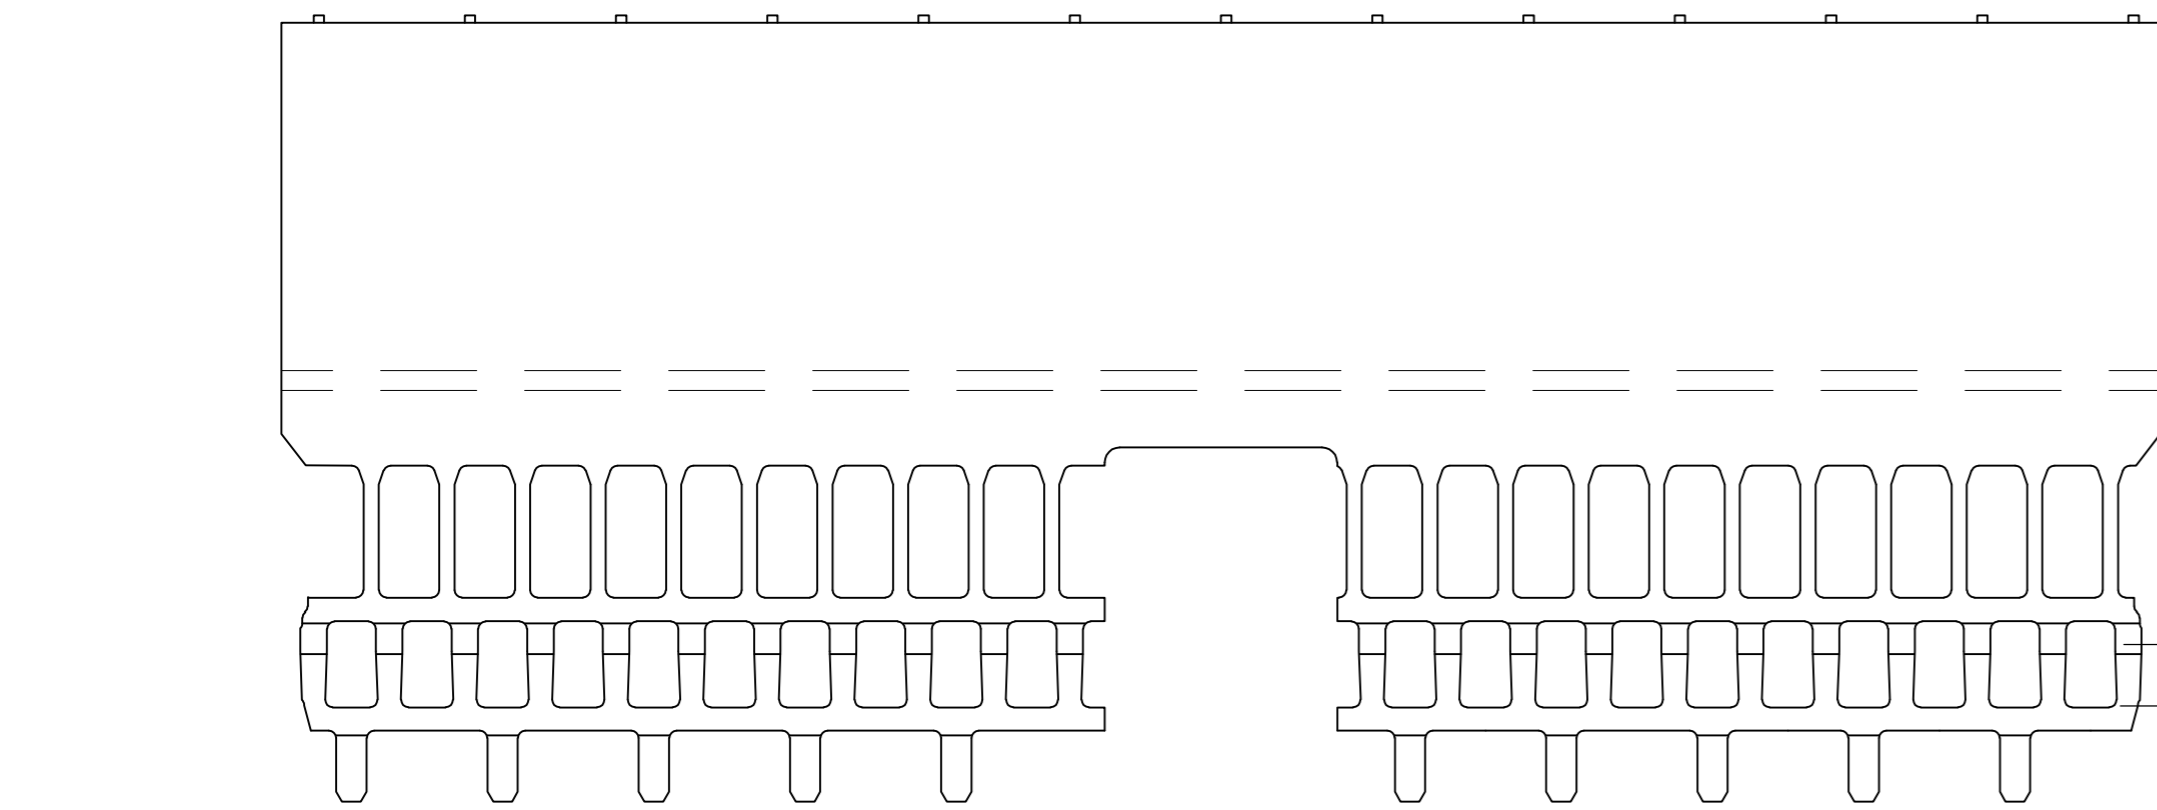


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		J		REVISED PER ECR-13-000757	18JAN2013	FL	AC

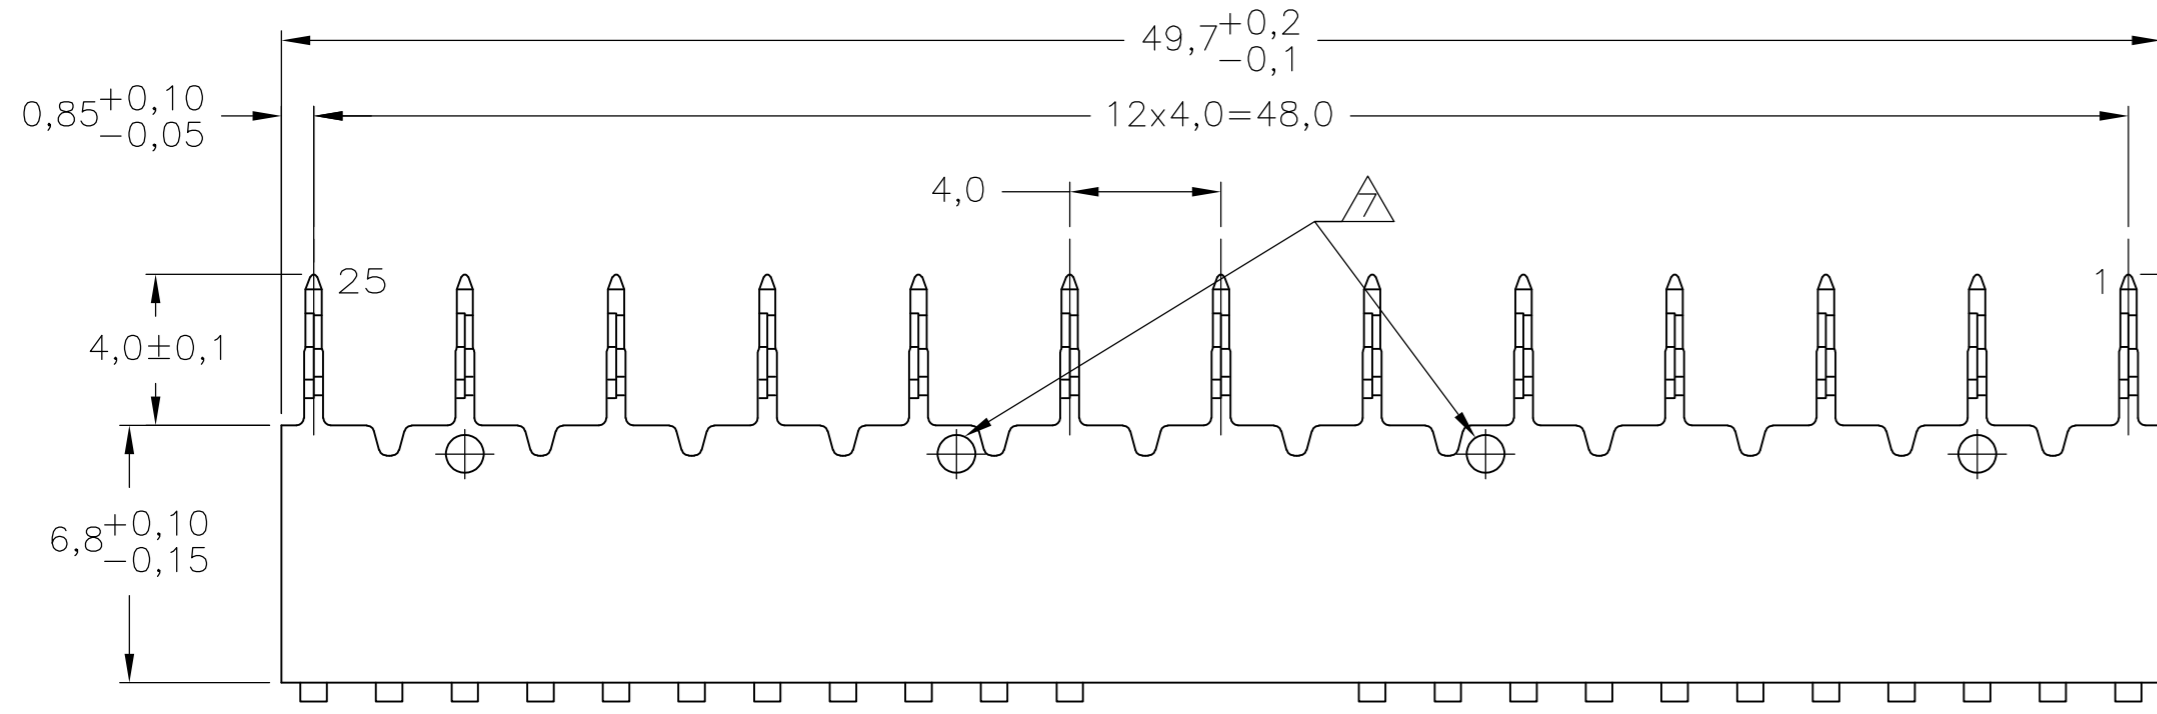

- NOTES:
- 1 PLATING:
CONTACT AREA : 0.76um Au. MIN. OVER 1.27um Ni MIN.
ACTION PIN : 0.5um SnPb MIN.
REMAINDER : Ni
 - 2 MATERIAL; PHOSPHOR BRONZE.
 - 3 ROW "f" 13 PLATED THROUGH HOLES FOR UPPERSHIELD
 - 4 HOLE PATTERN FOR FEMALE CONNECTOR TYPE A
110 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.
 - 5 SHIELD LUBRICATED WITH BELLCORE APPROVED LUBRICANT.
TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.
 - 6 PLATING:
CONTACT AREA : 0.76um Au. MIN. OVER 1.27um Ni MIN.
ACTION PIN : 0.5um SnPb MIN. ASTM B579 60/40
REMAINDER : Ni
 - 7 OPTIONAL DIMPLES AT DISCRETION OF DIE ENGINEER.
 - 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
 - 9 PLATING:
CONTACT AREA : 1.27um Au. MIN. OVER 1.27um Ni MIN.
ACTION PIN : 0.5um SnPb MIN.
REMAINDER : Ni
NO LUBRICANT.

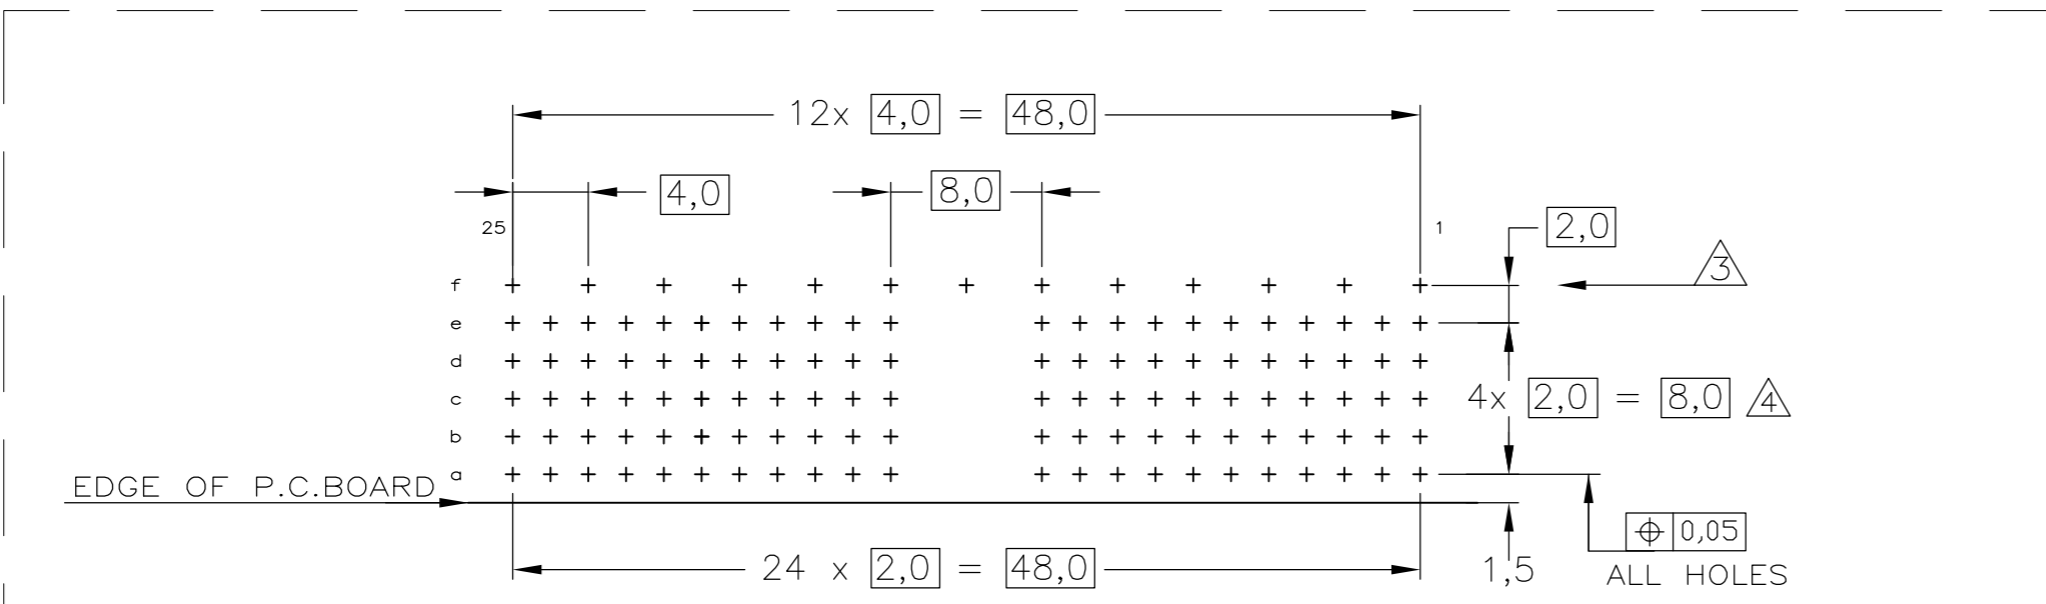

COMPONENT SIDE AS SHOWN
 RECOMMENDED PCB-HOLE LAY-OUT

P.C.B. HOLE DIM. ACTION PIN
 FOR DETAILS SEE APPLICATION SPECIFICATION

	FINISH	MATERIAL	PARTNUMBER
9		2	9-338107-3
6, 5		2	9-338107-1
1, 5		2	338107-9
1		2	338107-2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. TRUREN 28-11-96	TE Connectivity	
DIMENSIONS: mm		CHK W/ v.d.HEIJDEN 28-11-96	Z-PACK 2mm HM GROUND RETURN UPPER SHIELD TYPE A	
TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2		APVD F. v.KONINGSBRUGGE	NAME	
9-PLG ±		PRODUCT SPEC	108-19082	
1-PLG ±		APPLICATION SPEC	114-19029	
2-PLG ±		WEIGHT	-	
3-PLG ±		CUSTOMER DRAWING		
4-PLG ±		SCALE	5:1	
ANGLES ±		SHEET	1 of 1	
FINISH		REV	J	