



MATERIAL TYPE	PRODUCT CODE	PART SIZE CODE	SELECTED DIMENSION COD	ADDITIONAL E DESCRIPTION	PACKAGING CODE	
28	F	0121 -	0	s	R	
STEWARD PART NUMBERING SYSTEM						

Ambient Operating Temperature Range :-55°C to + 125°C





STEWAR	(10 Pb Free				
DM	3312	х	101	R	- 00
PRODUCT SERIES CODE	PART SIZE CODE	RATED CURRENT CODE	IMPEDANCE VALUE CODE	PACKAGING CODE	ADDITIONAL DESCRIPTION

Ambient Operating Temperature Range : -55 'C to + 125 'C

Drawing Figure

Figure
Number
2

Electrical Characteristics


NET Z @ 100 MHz	DCR Max	Rated Current mA


http://www.steward.com/web part no.asp?line=EMC / EMI Board Level and Cable Core ... 2/19/2004

	160		0.018		6000				
Physical Dimensions									
Δ.									

A	В	B1	С		D	A	В	B1	С		D
mm	mm	mm	mm	C1 mm	mm	in	in	in	in	C1 in	in
3.20	1.60	0	1.35	0	0.51	0.126	0.063	0	0.053	0	0.020

Wire Dimensions							
T2 mm	T1 in	T2 in					
0	0	0					

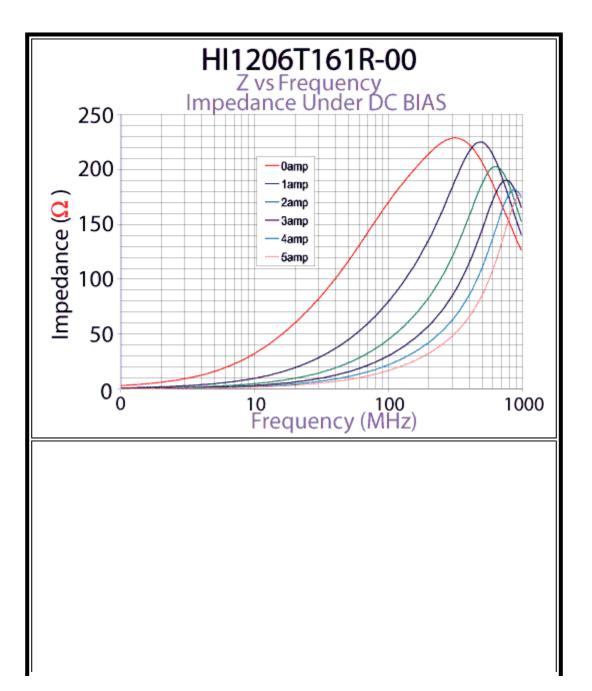

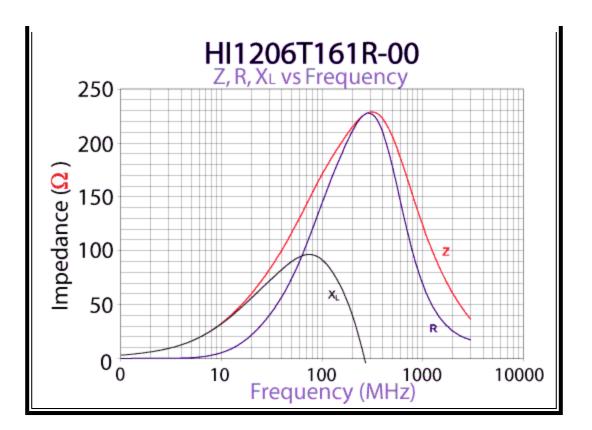

Specifications, which provide more details for the correct use of the described products, are available upon request. All specifications are subject to change without notice. For more information on any of the products listed above, please contact Steward customer service department at (800) 634-2673.

americas@steward.com

mexico@steward.com

europe@steward.com

asia@s<u>te</u>w

Copyright© 2004 Steward, Inc.

Last Updated: 2/19/2004