


CABLE WHITE PRINT  
 HI-SPEED USB Revision 2.0 SHIELDED 28AWG/1P+24AWG/2C  
 E189529 AWM STYLE 2725 80° C 30V VW-1

**PIN ASSIGNMENT:**

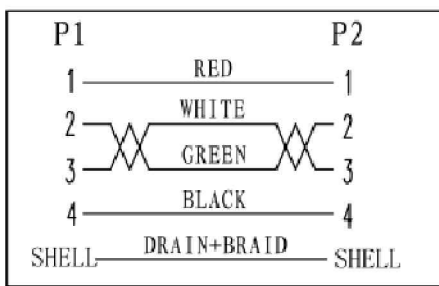

P/N	L(mm)	tolerance
AK672/2-1-BLACK-R	1000	±30
AK672/2-2-BLACK-R	2000	±50
AK672/2-3-BLACK-R	3000	±50
AK672/2-5-BLACK-R	5000	±50

**Electrical test:**  
 1. 100% short, open, miswire test  
 2. Conduct resistance: 2 Ohm(max)  
 3. Insulation resistance: 10Mohm(min)  
 4. dielectric test: DC 300V

NO.	NAME	Q'TY	SPECIFICATION
①	PE BAG	1/10	CLEAR SIZE:280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS".
⑦	PE BAG	1	CLEAR SIZE:130*230*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC".
⑥	TIE	2	BLACK L=100mm
⑤	OUT JACKET	6g	BLACK PVC-40P (MOULD NO:WM-65)
④	OUT JACKET	6g	BLACK PVC-40P (MOULD NO:WM-40)
③	CABLE	1	BLACK USB2.0 UL2725 28#/1P+24#/2C+AEB OD:4.7mm
②	CONN	1set	USB2.0 B MALE SHELL:NICKEL PIN G/F 3PCS TYPE INSULATOR COLOR:WHITE
①	CONN	1set	USB2.0 A MALE SHELL:NICKEL PIN G/F 4PCS TYPE INSULATOR COLOR:WHITE

**RoHS compliant**  
 Unit:mm

Scale	FREE
TOLERANCE	
X.X	
X.XX	
X.XXX	
DIM	TOL
X.°	
Angle	TOL

Scale	FREE	Date	Name	Customer-No.
Drawn		11.02.2014	Joanna	
Approved		11.02.2014	Joanna	
Drawn	①	11.02.2014	Joanna	
Modification	Id.	Date	Name	



ASSMANN WSW-No. <b>AK672/2-X-BLACK-R</b>	Drawing-No. ASS 7067 CA	rev00
Replace	Sheet	