

4833, solder terminal, insulated, 2-pole, Audio Plug/sockets, 6.3 mm



Description

- Solder terminal :
for cable mounting
- Audio entrances and exits
- Data and Signal transfer
- Audio Plug: 2-pole , insulated , straight

References


Alternative: Housing shielded [4833.1200](#)

Technical Data

Diameter	6.3 mm	Allowable Operation Temperature	-20 °C to 70 °C
Number of Poles	2-pole	Terminal	solder terminal nickel-plated
Ratings DC	1 A / 30VDC	Housings	insulated
Ratings AC	1 A / 30VAC	Style	straight
Dielectric Strength	500VDC	Lifetime	5000Insertions
Insulation Resistance	> 50 MΩ @ 500VDC		

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

Dimensions

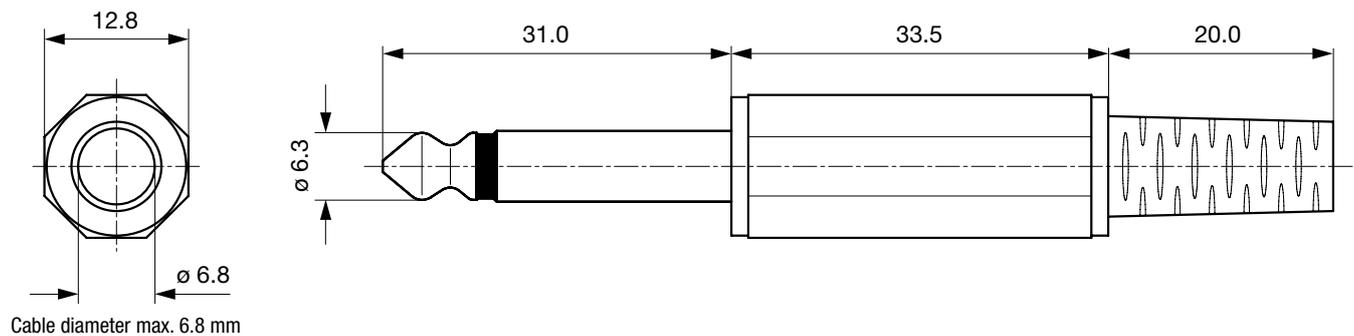

All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
Audio Plug/sockets	6.3	2-pole	solder terminal	4833.1210

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging unit 100 Pcs

Mating Outlets/Connectors

Category / Description



[Audio Plug/Sockets Overview complete](#)

4833, solder terminal, screened, 2-pole, Audio Plug/Sockets, 6.3 mm	4833.2200
4833, PCB terminals, insulated, 2-pole, Audio Plug/Sockets, 6.3 mm	4833.2230
4833, solder terminal, insulated, 2-pole, Audio Plug/Sockets, 6.3 mm	4833.3200

[Audio Plug/Sockets further types to 4833.1210](#)