

1

2

3



4

5





6

7

Length

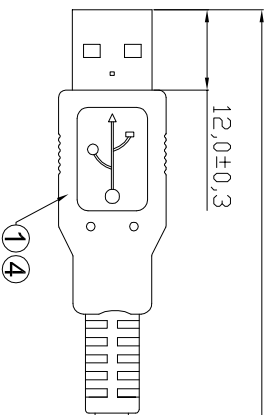

Cable BLACK print
 E320444 AWM STYLE 2725 80°C 30V VM-1 28AWG/1P 24AWG/2C
 ---c AWM III A 80°C 30V FT1 USB CABLE



A

B

C



D

E

F

G

H

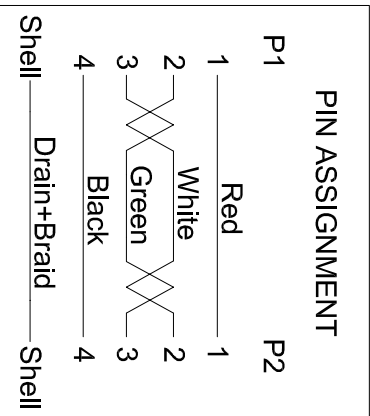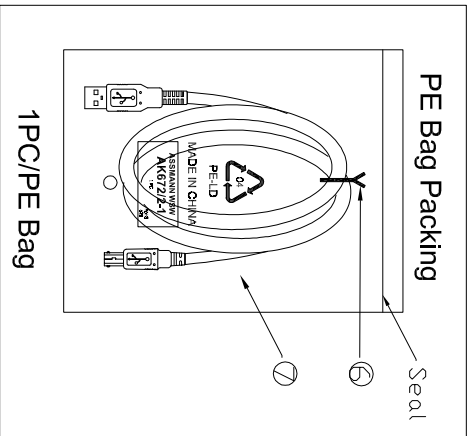

WSW P/N	Jacket color	Length(mm)
AK672/2-1	Beige	1000±30
AK672/2-2	Beige	2000±50
AK672/2-3	Beige	3000±50
AK672/2-5	Beige	5000±50

- Electrical test:**
- 100% short, open, miswire test
 - Conduct resistance: 2 Ohm max.
 - Insulator resistance: 10Mohm min.
 - Dielectric test: DC 300V

NO.	NAME:	QTY	SPECIFICATION
⑦	PE Bag	1	Clear Print black "MADE IN CHINA" + "1PC"
⑧	TIE	1	White
⑨	Out Jacket	6g	Beige(IV-29#) PVC-40P
⑩	Out Jacket	6g	Beige(IV-29#) PVC-40P
⑪	Cable	1	Beige(IV-29#) USB2.0 UL2725 28#/1P+24#/2C+AEB OD:4.7mm
⑫	CONN	1	USB 2.0 B Male Shell:Nickel Pin:G/F Insulator color: White
⑬	CONN	1	USB 2.0 A Male Shell:Nickel Pin:G/F Insulator color:White

RoHS compliant
 Unit: mm

Scale	Free
TOLERANCE	
DIM	TOL
Angle	TOL

Update the drawing	Date	Name
①	26.01.2016	Amy
②	11.02.2014	Joanna

Customer-No.	ASSMANN WSW-No.	Drawing-No.	Replace
		ASS 7066 CA	rev01
		AK672/2-X	Sheet



1

2

3

4

5

6

7

H