


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION			
REV.	DESCRIPTION	DATE	APPROVED

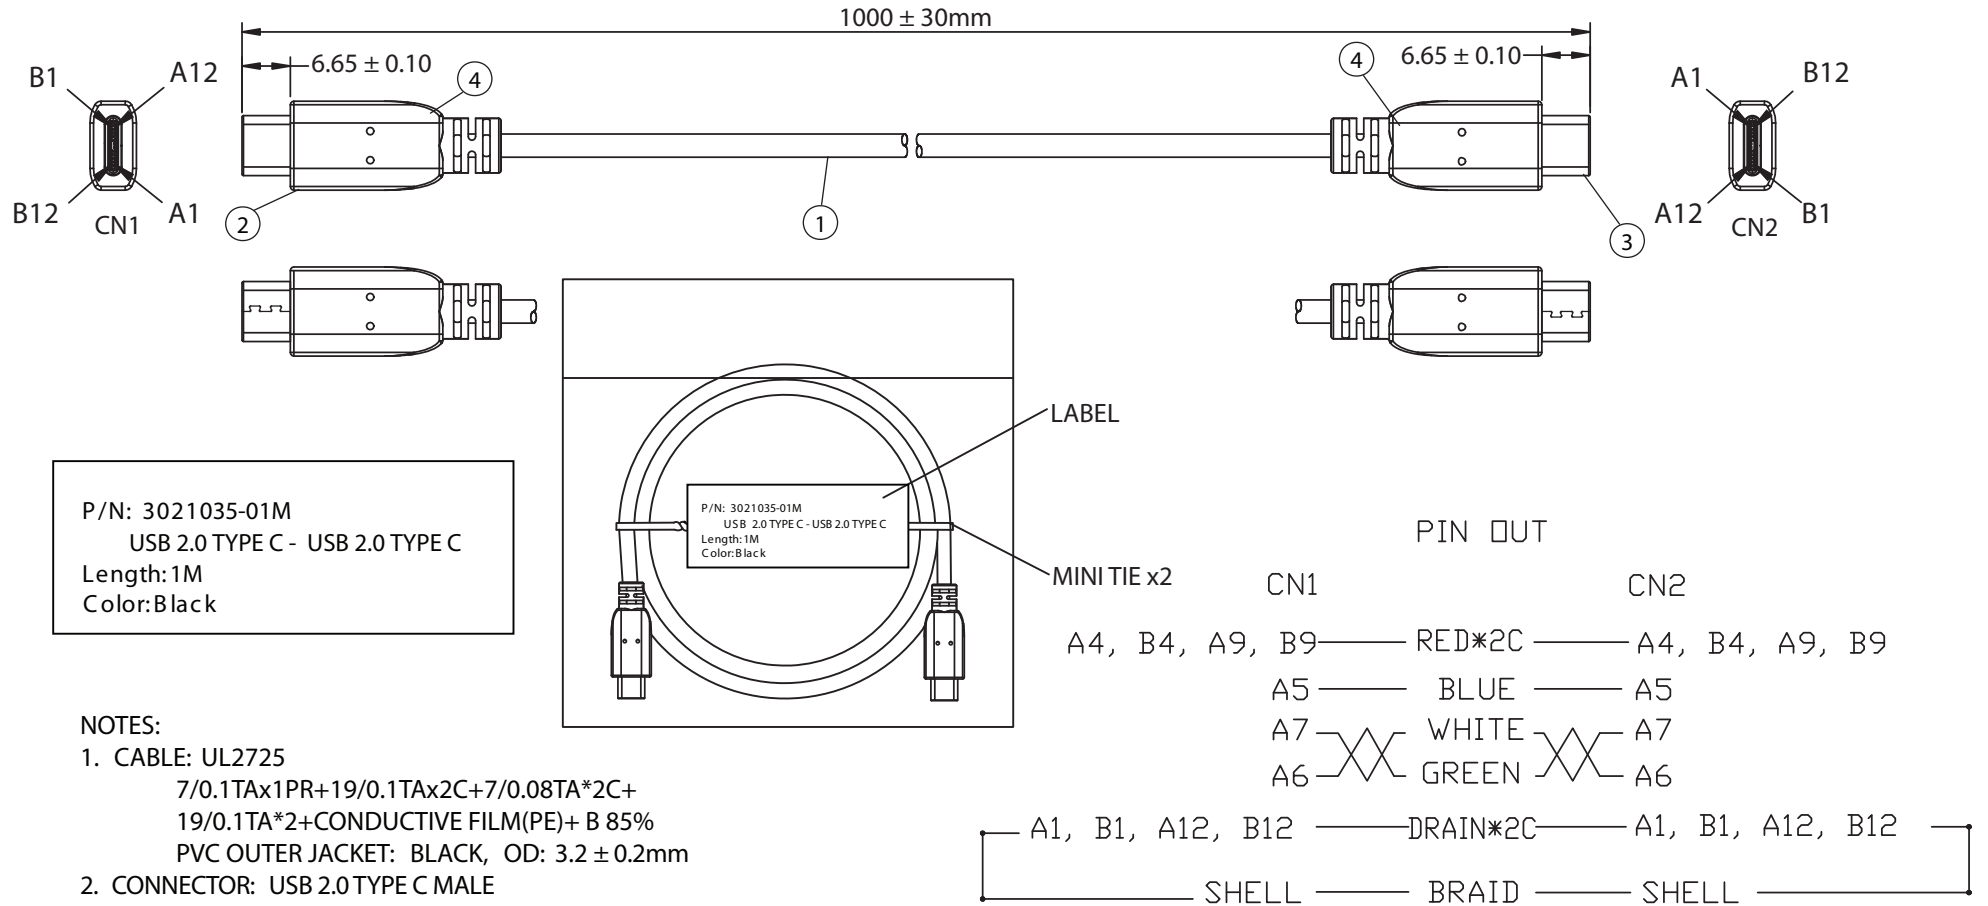

NOTES:

- CABLE: UL2725
7/0.1TAx1PR+19/0.1TAx2C+7/0.08TA*2C+
19/0.1TA*2+CONDUCTIVE FILM(PE)+ B 85%
PVC OUTER JACKET: BLACK, OD: 3.2 ± 0.2mm
- CONNECTOR: USB 2.0 TYPE C MALE
INSULATOR: BLACK PBT
PIN GOLD PLATED
NICKEL PLATED SHELL
- CONNECTOR: USB 2.0 TYPE C MALE
INSULATOR: BLACK PBT
PIN GOLD PLATED
NICKEL PLATED SHELL
- PVC MOLDED: COLOR V398 45P BLACK
- ELECTRICAL TEST:
<1>.100% OPEN SHORT & MISS WIRE TEST
- DATA TRANSFER RATE UP TO 480Mbps (NOMINAL)
- CURRENT RATING UP TO 3A (NOMINAL)
- VOLTAGE RATING UP TO 20V (NOMINAL)
- PACKING: 1PC/POLYBAG W/ LABEL

CONTROLLED

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. WCI DIVISION		
		Part Number: 3021035-01M		RoHS Compliant
0-1	0.15	Description: USB 2.0(C)/M - USB 2.0 (C)/M		
1-6	0.20	UNIT: mm		
6-18	0.30			
18-50	0.50			
50-120	0.70	Drawn / Date	Checked / Date	Approved / Date
120-250	0.90	R. Nuti 08-24-15	08-24-15	LY / 08-24-15
250-500	1.20			