


NOTES:

1.0 ELECTRICAL SPECIFICATIONS:

- 1.1 FREQUENCY RANGE: DC to 18.0 GHz
- 1.2 MAXIMUM INPUT POWER: 0.5 WATTS @ +25°C
DERATED LINEARLY TO 0 WATTS @ +125°C
- 1.3 OPERATING TEMP. RANGE: -55°C to +125°C
- 1.4 IMPEDANCE: 50 OHMS
- 1.5 VSWR: 1.05 +0.008f(GHz)

2.0 MARKING: MARK UNIT AS SHOWN
(REF.: INK-09035-27-08)

3.0 DIMENSIONS IN PARENTHESIS ARE IN
MILLIMETERS.

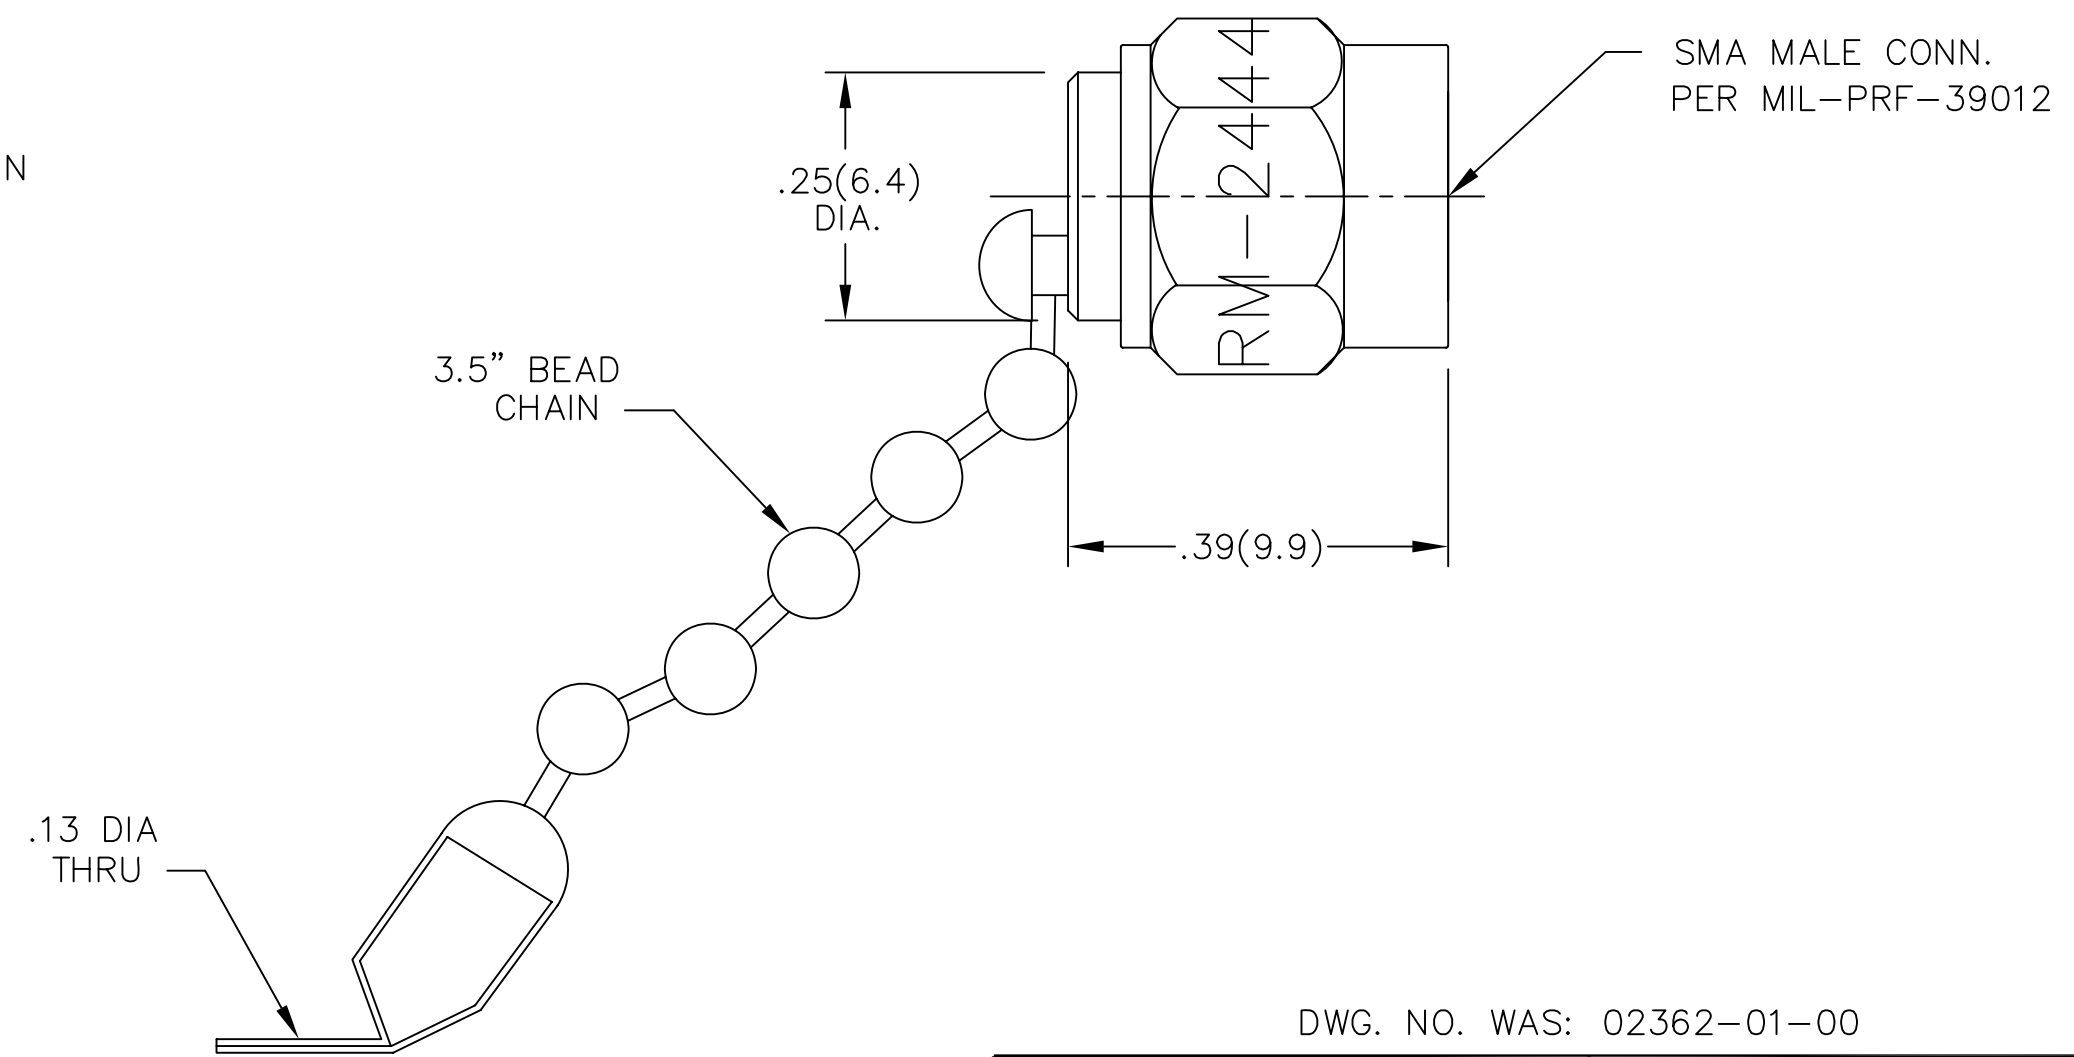

DWG. NO. WAS: 02362-01-00

REV.	DESCRIPTION	DATE
-	RELEASED	3/21/79
A	ECR 6545	6/29/89
B	ECR 7520	7/10/90
B1	REDRAW ON CAD	8/30/91
C	ECN 13432	3/9/94
C1	ADDED TITLEBLOCK	11/15/05

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°	FSCM NO. 34078	MIDWEST MICROWAVE	
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave	TITLE TERMINATION	
	DRAWN/DATE A.BEATTY 8/30/91	ENG./DATE G.KOZAK 9/3/91	DRAWING NUMBER TRM-2444-MC-SMA-02
	CHECKED/DATE C.RICKARD 9/3/91	APPROVED/DATE	SCALE: 5=1 SHEET 1 of 1