


DATASHEET

Ambient Light Sensor – Surface Mount EAALSDIC2012A3



Features

- Close responsively to the human eye spectrum
- · Light to Current, analog output
- · Good output linearity across wide illumination range
- Low sensitivity variation across various light sources
- Operating temperature performance, -40oC to 85oC
- Wide supply voltage range, 1.8V to 5.5V
- Size: 1.6mm(L)*1.6mm(W)*0.55mm(H)
- RoHS compliant, Pb Free and halogen free package
- Compliance with EU REACH.

Description


The EAALSDIC2012A3 is consisting of a photodiode and a current amplification IC. Everlight Americas ALS series product is a good effective solution to the power saving of display backlighting of mobile appliances, such as the mobile phones, NB and PDAs. Due to the high rejection ratio of infrared radiation, the spectral response of the ambient light sensor is close to that of human eyes.

Applications

- Detection of ambient light to control display backlighting
 Mobile devices mobile phones, PDAs
 Computing device TFT LCD monitor for Notebook computer
 Consumer device TFT LCD TV, plasma TV, video camera, digital camera, toys
- · Automatic residential and commercial management
- Automatic contrast enhancement for electronic signboard
- Ambient light monitoring device for daylight and artificial light
 - Street light, CCD/CCTV




Package Dimensions

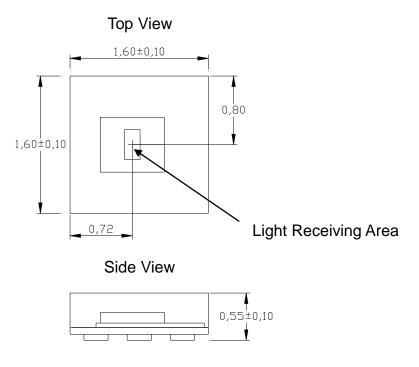

Bottom View

Recommended Soldering Pattern

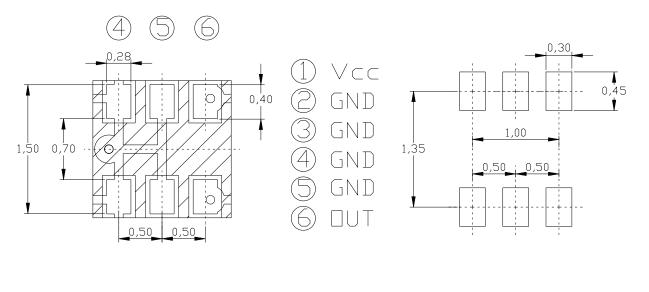

Note: Tolerances unless mentioned ±0.2mm. Unit = mm



Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
Supply Voltage	V _{cc}	-0.5 ~ 6.0	V
Output Voltage	Vo	0 ~ V _{CC} -0.8	V
Output Photo Current	I _{PH}	0 ~ 5	mA
Operating Temperature Range	T_{opr}	-40 ~ +85	$^{\circ}\!\mathbb{C}$
Storage Temperature Range	T_{stg}	-40 ~ +100	$^{\circ}\mathbb{C}$
Soldering Temperature Range [Note1]	T_{sol}	260	$^{\circ}\!\mathbb{C}$

Note1: For detail reflow time and the recommended temperature profile, please refer to page 8.

Recommended Operating Conditions

Parameter	Symbol	Min	Max	Unit
Operating Temperature	T_{opr}	-40	+85	$^{\circ}\!\mathbb{C}$
Supply Voltage	V_{CC}	1.8	5.5	V



Electro-Optical Characteristics (Ta=25℃)


Paran	neter	Symbol	Min.	Тур.	Max.	Unit	Condition	
Supply (Current	I _{CC}		480	950	μΑ	V_{CC} =3V, E_V =1000Lux R_L =1K Ω	
Dark C	urrent	I _D			100	nA	V _{CC} =3V, E _V =0Lux	
Light Current		I _{PH1}	2.7	4	5.4	μΑ	V_{CC} =3V, E_V =10Lux [Note1]	
		I _{PH2}	27	40	54	μΑ	V_{CC} =3V, E_V =100Lux [Note1]	
		I _{PH3}		48	92	μΑ	V_{CC} =3V, E_V =100Lux [Note2]	
		I _{PH4}		400	540	μΑ	V_{CC} =3V, E_V =1000Lux [Note1]	
Photocurre	ent Ratio	I _{PH3/} I _{PH2}		1.2	1.7			
Saturation Ou	ıtput Voltage	Vo	2.20	2.35		V	V_{CC} =3 V , E_V =100 Lux R_L =150 $K\Omega$ [Fig.3]	
Peak Sensitivity	Wavelength	λ_{P}		550		nm		
Switching Time	Rise Time	t _r		11	1000	μs		
	Fall Time	t _f		400	2000	μs	$V_{CC}=3V, E_V=1000Lux$	
	Delay Time	t _d		250		μs	$R_L=5K\Omega$ [Fig.4]	
	Storage Time	t _s		35		μs		

Note:

^{1.} White Fluorescent light (Color Temperature = 6500K) is used as light source. However, White LED is substituted in mass production.


^{2.} Illuminance by CIE standard illuminant-A / 2856K, incandescent lamp.



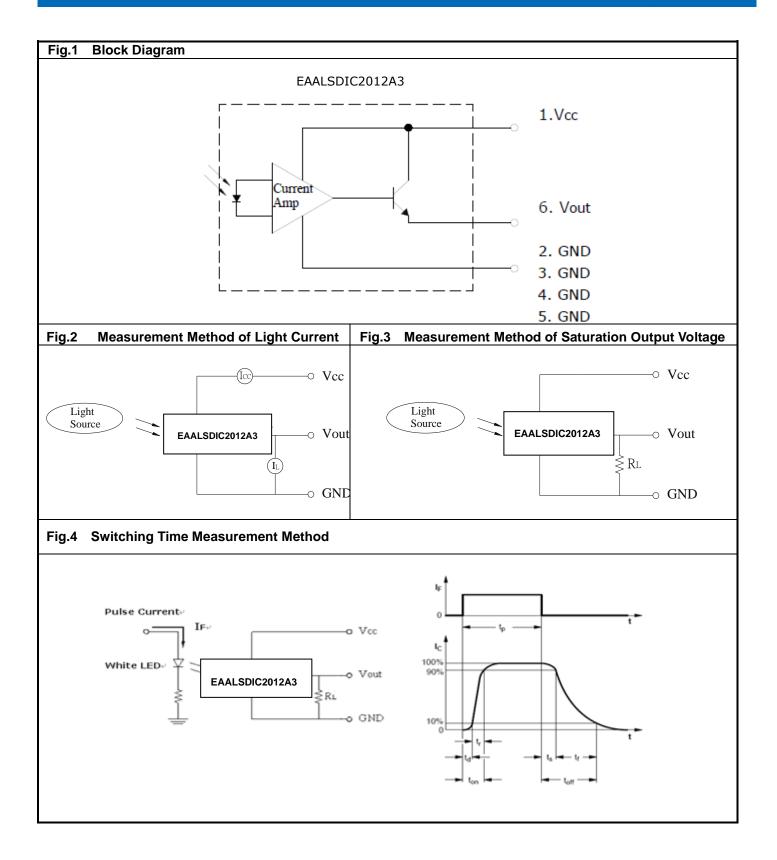





Typical Electro-Optical Characteristics Curves

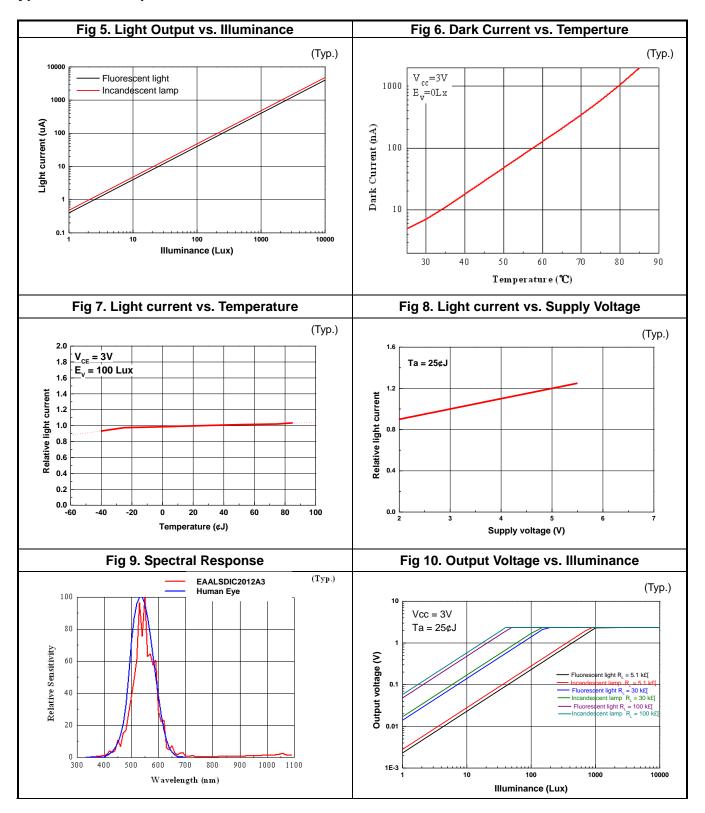



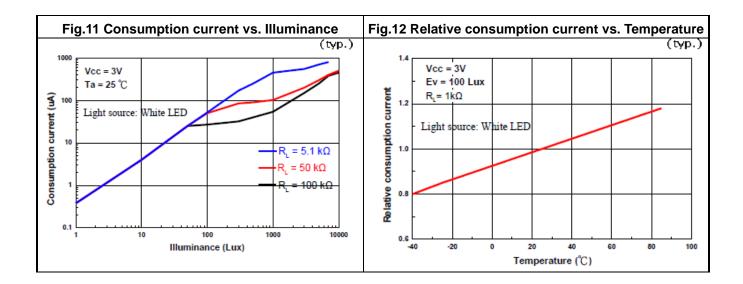

Converting Photocurrent to Voltage



Note:

- 1. The output voltage (Vout) is the product of photocurrent (IPH) and loading resistor (RL)
- 2. A right loading resistor shall be chosen to meet the requirement of maximum ambient light, and output saturation voltage:

$$V_{out}(max.) = I_{out}(max.) \times R_L \le V_{out}(saturation) = V_{cc} - 0.8V$$

3. To avoid 60Hz ripple from fluorescent lamps, we suggest that the time constant must be greater than 0.5 second:


$$R_L imes C_L \geqq 0.5$$
 (empirical data)



Recommended method of storage

- 1. Do not open moisture proof bag before devices are ready to use.
- 2. Shelf life in sealed bag from the bag seal date: 18 months at 10°C~30°C and < 90% RH.
- 3. After opening the package, the devices must be stored at $10^{\circ}\text{C}\sim30^{\circ}\text{C}$ and $\leq 60\%\text{RH}$, and used within 1 year (floor life).
- 4. If the moisture absorbent material (desiccant material) has faded or unopened bag has exceeded the shelf life or devices (out of bag) have exceeded the floor life, baking treatment is required.
- 5. If baking is required, refer to IPC/JEDEC J-STD-033 for bake procedure or recommend the following conditions: 192 hours at 40°C +5/-0°C and < 5 % RH (reeled/tubed/loose units) or 96 hours at 60°C ± 5°C and < 5 % RH (reeled/tubed/loose units) or 24 hours at 125°C ± 5°C, not suitable for reel or tubes.

Recommended Solder Profile

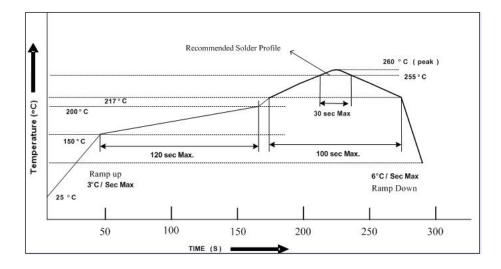

Notice:

- (1) Reflow soldering should not be done more than two times.
- (2) When soldering, do not put stress on the devices during heating.
- (3) After soldering, do not warp the circuit board.




Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

Repairing

Repair should not be done after the device have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the device will or will not be damaged by repairing.

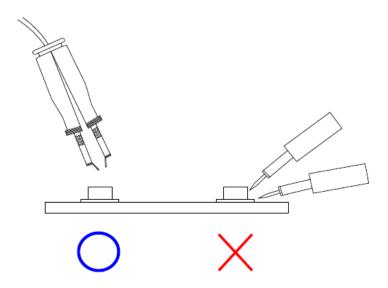



Package Quantity Specification


4000 PCS/ 1 Reel

Label Format



- · CPN: Customer's Product Number
- P/N: Product Number
- · QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Dom. Wavelength Rank
- REF: Forward Voltage Rank
- · LOT No: Lot Number
- · MADE IN TAIWAN: Production Place

Reel Dimensions

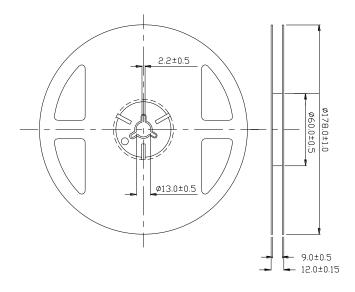


Note: Tolerances unless mentioned ± 0.1 mm. Unit = mm





Tape Dimensions

Progressive direction

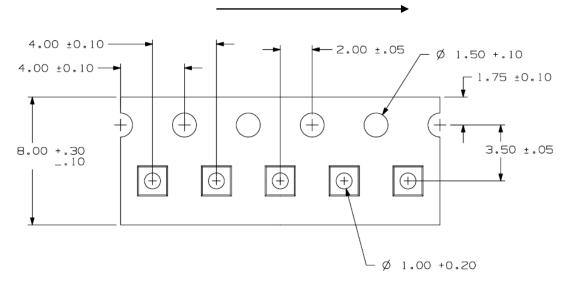

Unit: mm

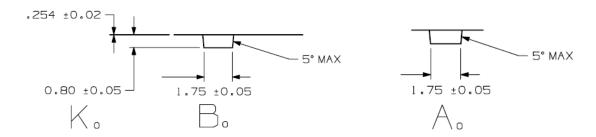

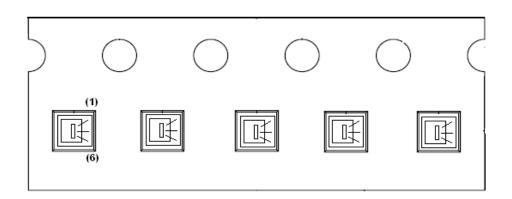

Unit: mm

Tolerance: ±0.1mm

DATASHEET I²C Digital Ambient Light Sensor – Surface Mount EAALSDIC2012A3



Note:

- Above specification may be changed without notice. Everlight Americas will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. Everlight Americas assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 3. These specification sheets include materials protected under copyright of Everlight Americas Inc. Please don't reproduce or cause anyone to reproduce them without Everlight Americas's consent.