




# FLORENTINA 12-up multiholder

- Linear multiholder with glare protection for 12 pieces of TINA/TINA2 lenses.
- Dimensions  
C14445\_FLORENTINA-HLD: 286 x 20 x 10 mm  
C14446\_FLORENTINA-SHD: 287 x 28 x 23 mm
- 3 position pins
- Fastening by either glue, screws or with additional retaining clips C14353\_FLORENCE-1R-CLIP-A or C14409\_FLORENCE-1R-CLIP-B
- Can be installed into aluminium profile
- For smaller LED's possibility to lower holder for 0.2 mm with PCB design

## Typical FWHMs of different compatible optics

	Real spot	Smooth spot	Medium	Wide	Very Wide	Diffuser	Oval
TINA	13°	N/A	19°	41°	52°	16°	36°x16°
TINA2	14°	23°	20°	N/A	58°	16°	35°x17°

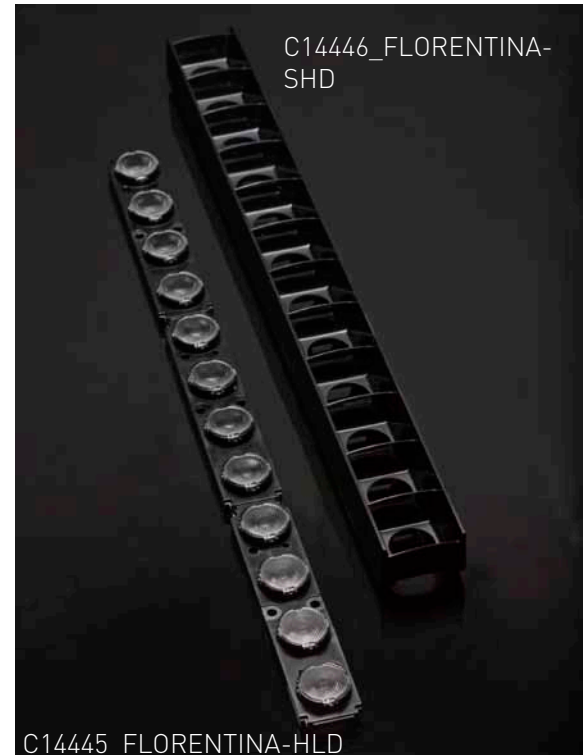

## LED compatibility

	LED	C11004_ TINA2-RS	C12336_ TINA2-SS	C11005_ TINA2-XP-M	C11050_ TINA2-XP-O	C11417_ TINA2-XP-D	F10835_ TINA-XP-W	F11007_ TINA-WW-XP
Cree	XB-D	•	•	•	•	•	•	•
	XB-H	•	•	•	•	•	•	•
	XP-C	•	•	•	•	•	•	•
	XP-E	•	•	•	•	•	•	•
	XP-G	•	•	•	•	•	•	•
	XP-L	•	•	•	•	•	•	•
	XQ-E	•	•	•	•	•	•	•
Nichia	757	•	•	•	•	•	•	•
	NCS19	•	•	•	•	•	•	•
	NCSW119E	•	•	•	•	•	•	•
	NCSxx19B	•	•	•	•	•	•	•
	757DR	•	•	•	•	•	•	•
	NVS19	•	•	•	•	•	•	•
	NVSxx19A	•	•	•	•	•	•	•
NVSxx19B	•	•	•	•	•	•	•	



	LED	C11004_ TINA2-RS	C12336_ TINA2-SS	C11005_ TINA2-XP-M	C11050_ TINA2-XP-O	C11417_ TINA2-XP-D	F10835_ TINA-XP-W	F11007_ TINA-WW-XP
Osram	Duris S5	•	•	•	•	•	•	•
	Oslon Square PC	•	•	•	•	•	•	•
	Oslon Square	•	•	•	•	•	•	•
	Oslon SSL 150	•	•	•	•	•	•	•
	Oslon SSL 80	•	•	•	•	•	•	•
Philips Lumileds	Luxeon 3020	•	•	•	•	•	•	•
	LUXEON Q	•	•	•	•	•	•	•
	LUXEON Rebel	•	•	•	•	•	•	•
	LUXEON T	•	•	•	•	•	•	•
	LUXEON Z ES	•	•	•	•	•	•	•
	LUXEON Z	•	•	•	•	•	•	•
Samsung	3535H	•	•	•	•	•	•	•
Seoul	3030	•	•	•	•	•	•	•
	Z5	•	•	•	•	•	•	•
	Z5M1	•	•	•	•	•	•	•
	Z5P	•	•	•	•	•	•	•
Toshiba	TL1L2	•	•					

Possibility to lower holder for 0.2 mm with PCB design

